


TGL Air - Linear High Bay - Technical Specifications

Type	Model Number	Voltage (V)	Watts (W)	Lumen LM	Colour Temp	Beam Angle	CRI	Rated Life (Hours)	LM/W	UL/ETL	DLC
Linear High Bay	TGL-AIRHB-100W-50K-V	120-277V	100W	17,775	5000K	90	73	50,000	145	ETL	DLC Prem
Linear High Bay	TGL-AIRHB-100W-50K-D	180-520V	100W	17,775	5000K	90	73	50,000	145	ETL	DLC Prem
Linear High Bay	TGL-AIRHB-150W-50K-V	120-277V	150W	22,000	5000K	90	73	50,000	145	ETL	DLC Prem
Linear High Bay	TGL-AIRHB-150W-50K-D	180-520V	150W	22,000	5000K	90	73	50,000	145	ETL	DLC Prem
Linear High Bay	TGL-AIRHB-200W-50K-V	120-277V	240W	29,254	5000K	90	73	50,000	145	ETL	DLC Prem
Linear High Bay	TGL-AIRHB-200W-50K-D	180-520V	240W	29,254	5000K	90	73	50,000	145	ETL	DLC Prem
Linear High Bay	TGL-AIRHB-240W-50K-V	120-277V	240W	33,600	5000K	90	73	50,000	145	ETL	DLC Prem
Linear High Bay	TGL-AIRHB-240W-50K-D	180-520V	240W	33,600	5000K	90	73	50,000	145	ETL	DLC Prem

TGL Inc. 2370 Meadowvale Blvd., Unit 4 Mississauga ON L5N 5P9
Tel: 416-855-3842 www.thinkgreenled.com



TGL - Air High Efficiency LED Linear High Bay

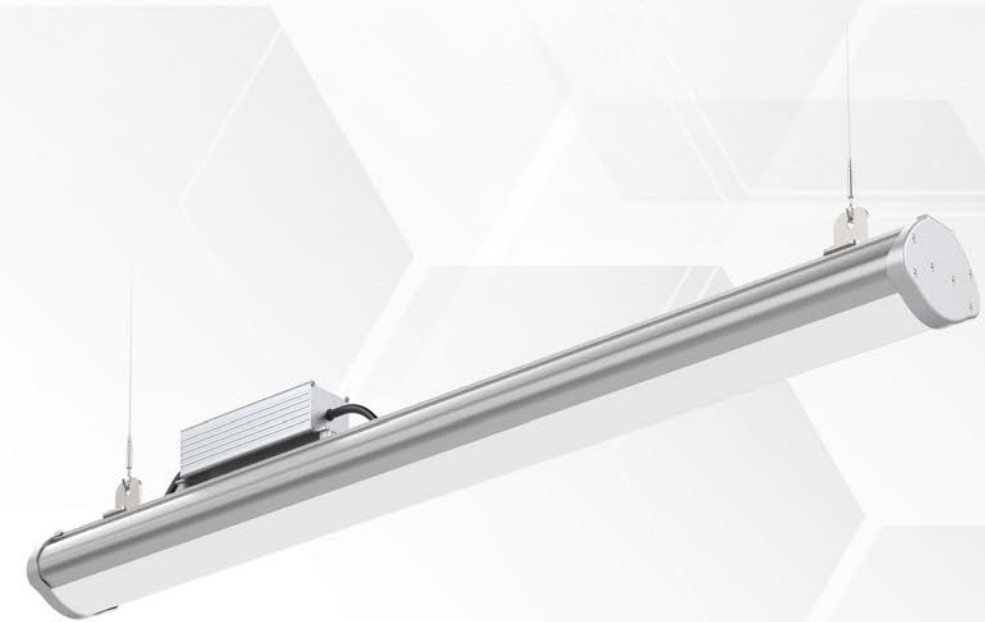

Industrial Grade Quality - Waterproof (IP65)
TGL Thundershock 10KV Surge Protection
Wide Temperature Range -40 to 50 Degrees Celcius

TGL Inc. 2370 Meadowvale Blvd., Unit 4 Mississauga ON L5N 5P9
Tel: 416-855-3842 www.thinkgreenled.com

TGL - Air Linear High Bay

The TGL Air Linear High Bay combines sleek modern design with high performance and industrial grade quality. Equipped with high efficiency Philips Lumiled LED chips and the industries top rated meanwell driver our TGL - Linear Air High Bay delivers great savings with great reliability.



Dustproof Design

Superior Lighting with no Glare



High Quality Construction

Mounting Kit

Stainless Steel rope are corrosion and age resistant.

Large Aircraft grade aluminum body provides greater spacing, and excellent heat dissipation to **assure long lifespan.**

Smooth exterior design makes fixture **dust proof** and ideal for food grade facilities.

High grade silicone seal provides water tight IP65 construction

Meanwell ELG 180-520V Driver

Externally Mounted spacers prevent heat transfer from driver to fixture.

Impact resistant polycarbonate frosted lens minimizes glare while providing perfect wide uniform light distribution.

Philips EC3030 high performance LED chips deliver 150 lm/w efficiency and high reliability.

Sensor Options with wireless controls



Thundershock™

Withstand toughest electrical conditions power surges 10,000 volts +.